




Samsung SGH A707 Logic Board Replacement

Replace a logic board on your Samsung SGH A707 phone.

Written By: yfm

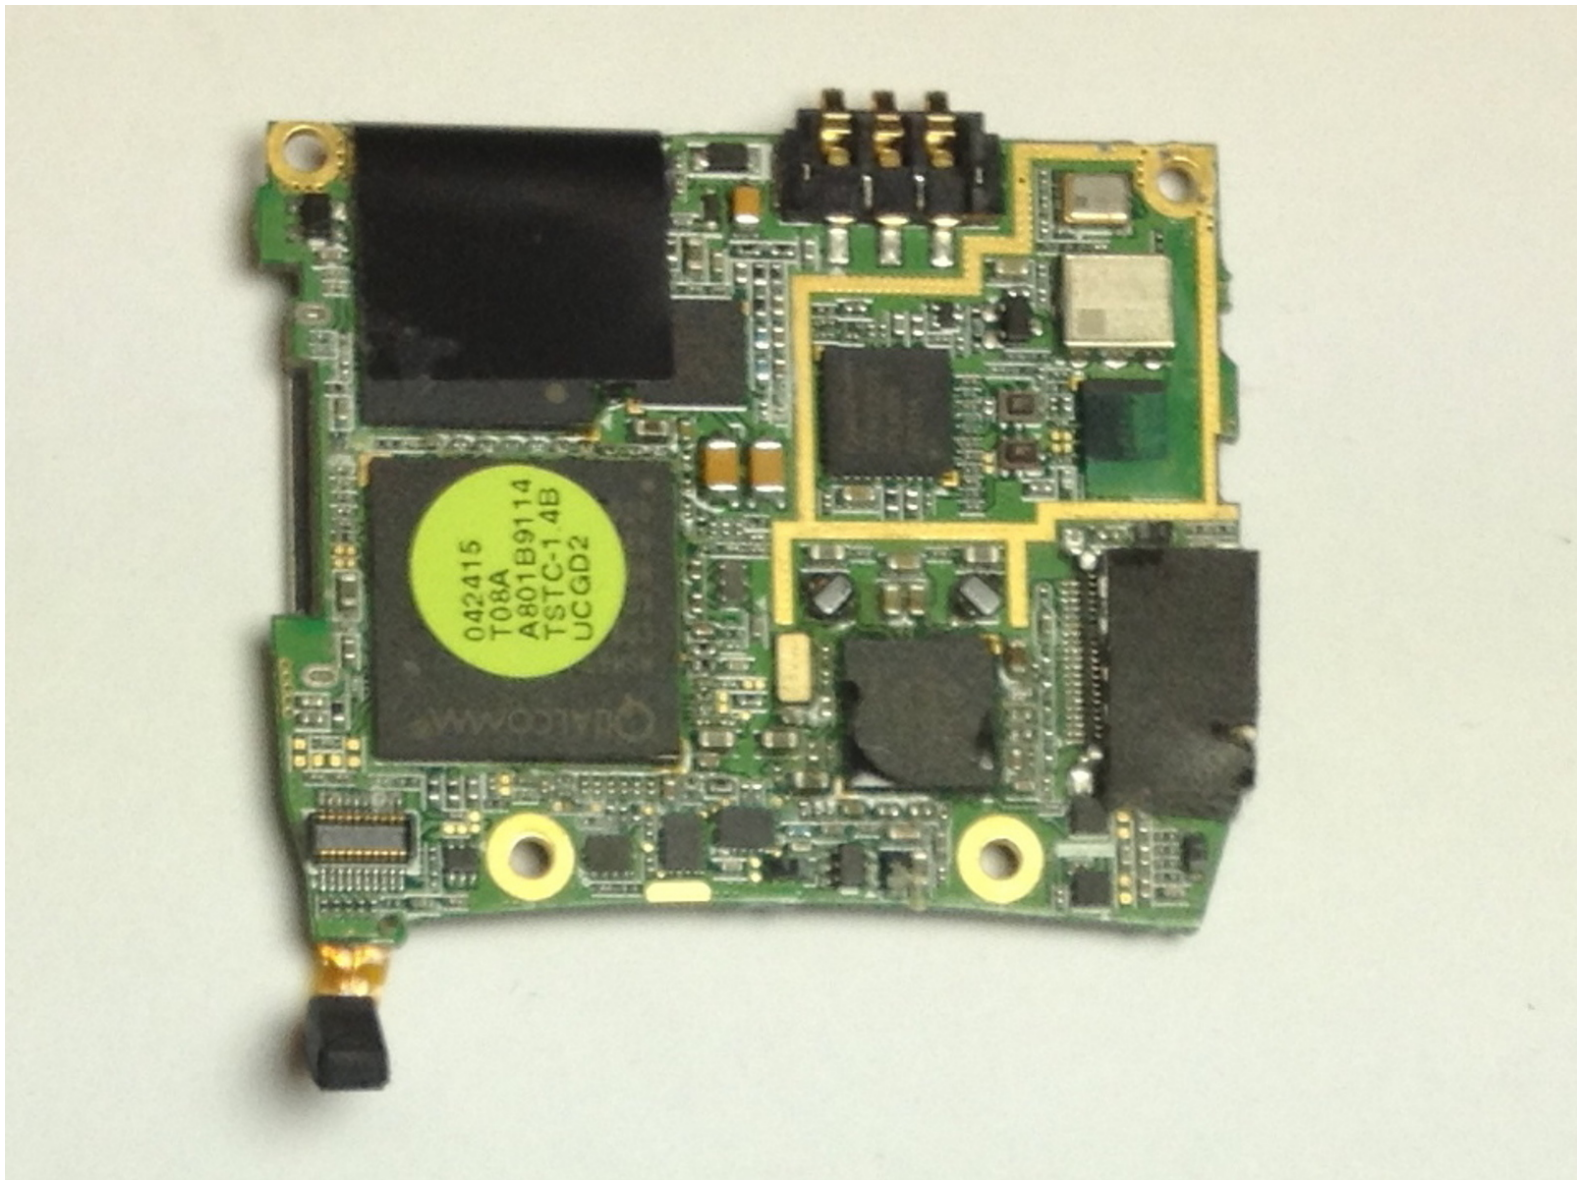

INTRODUCTION

Use this guide to replace your Samsung SGH A707 phone's logic board.



TOOLS:

- [Tweezers](#) (1)
 - [Phillips #0 Screwdriver](#) (1)
 - [iFixit Opening Tools](#) (1)
-

Step 1 — Battery



- Press on the markings on the cover and pull it down to reveal the battery.

Step 2



- Use your fingers to pull the battery out of its position. You may also flip the phone and the battery will fall out.

Step 3



- Here is the phone without the battery.

Step 4 — Logic Board



- Unscrew the six screws on the back of the phone using the Phillips #0 screw driver.

Step 5



- Use the prying tool the pry off the phone's plastic frame.

Step 6



- Use the prying tool to disconnect the rectangular connector.

Step 7




- Use the prying tool to disconnect the small connector.

Step 8



- Gently pull off the circuit board.

Step 9

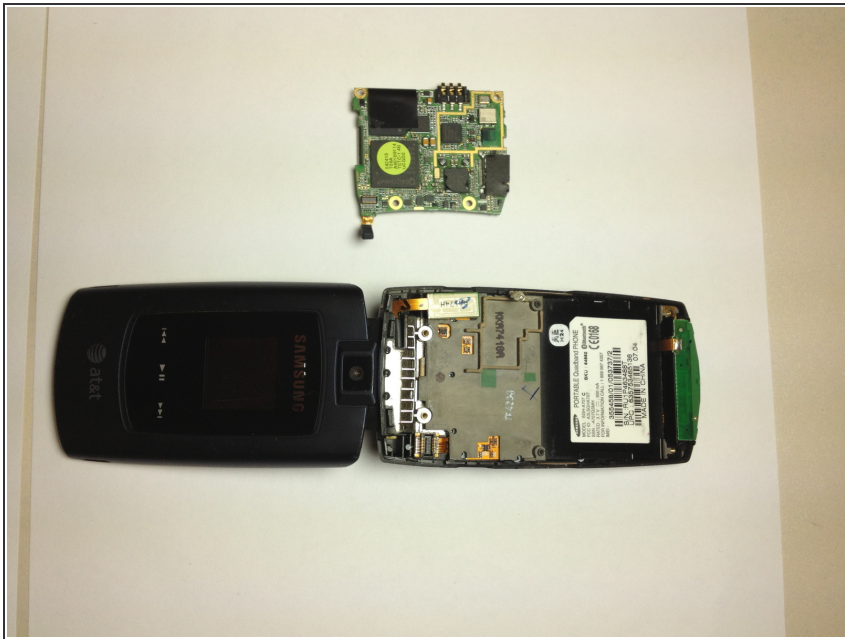

- Here is the phone without the logic board.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-18 04:30:03 PM.